


AQUA CENTRALIZER

CENTRALIZED POWER

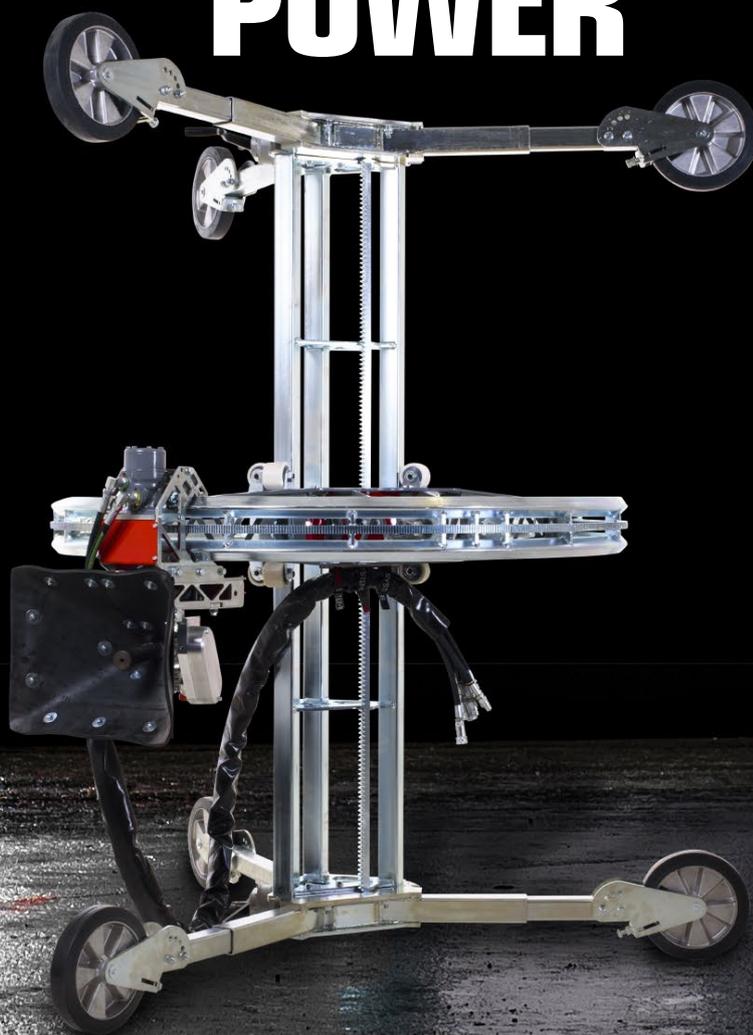


ACCESSORIES

AQUAJET
SYSTEMS AB




Centralized power

The centralizer is a 360° ring mounted on an Aqua Spine base that can be used for treating pipes or round tunnels from the inside. The Power Head can work a pre-set angle inside the tunnel or it can work the full range 360°. The power head and ring assembly indexes automatically along the spine rail to complete a whole tunnel section. It can operate both in horizontal tunnels or vertical/inclined tunnels where it can be positioned with a hoist device.

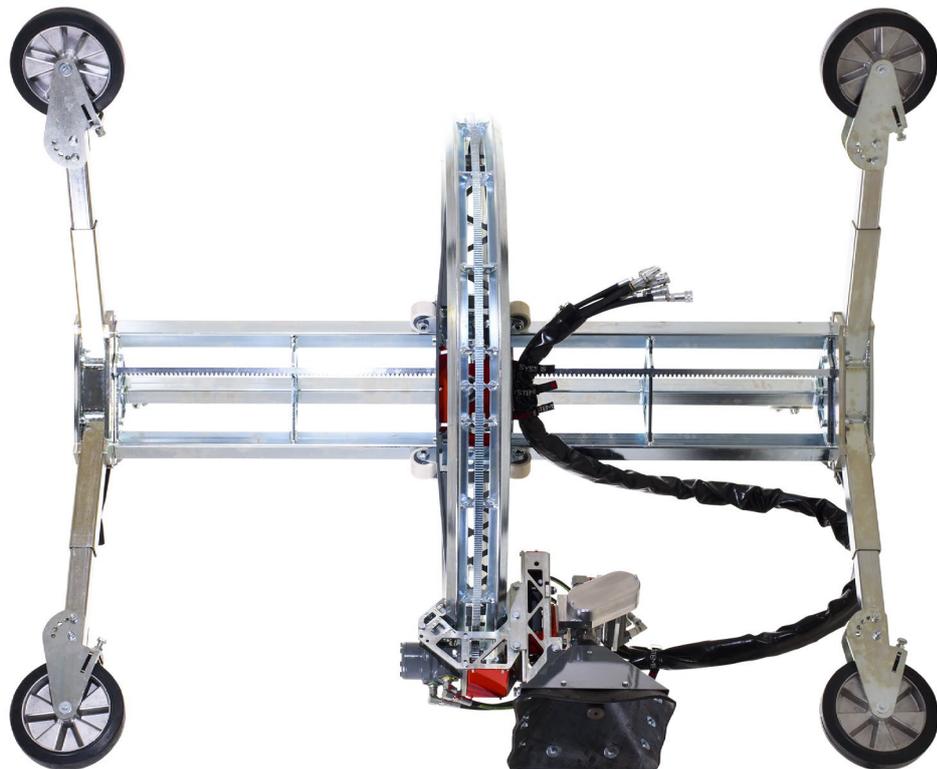

POWER HEAD

25° adjustable lance angle and adjustable stroke of oscillation. The head can be reversed to handle both inside pipes and outside pillars if used on the Circular Power Head.

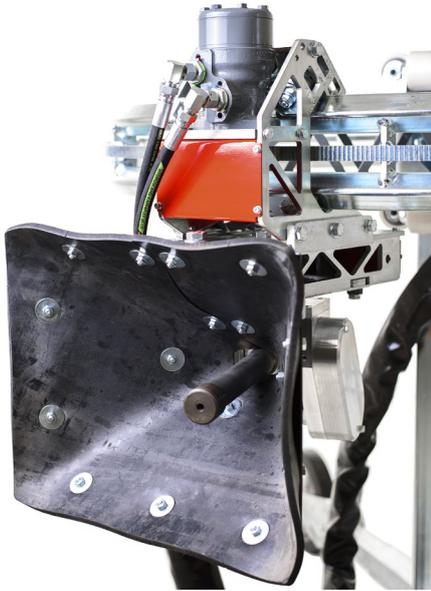


CONNECT THE POWER HEAD

The power head is easy to attach to the ring curved rail? And secured with one single bolt.



The Spine roller is attached to the spine rail in the same way.

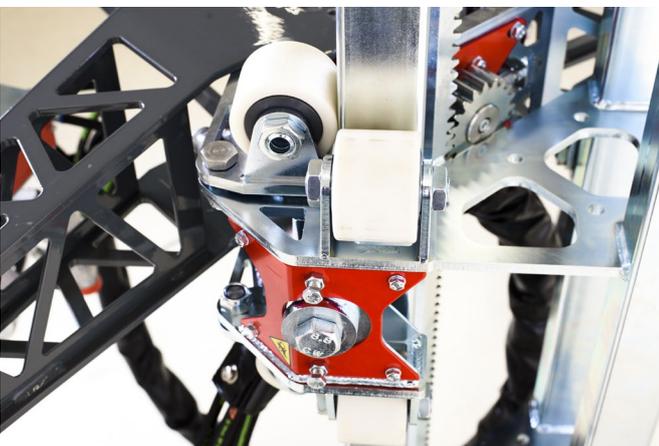

ADJUSTABLE DIAMETER


Centralizer rings are available in following diameters:

1,0m (fits 1,5-2,0m tunnel)

1,5m (fits 2,0-2,5m tunnel)

2,0m (fits 2,5-3,0m tunnel)

The bottom of the power head slides 250mm in and out to cover different pipe diameters in the 0,5m range between the different ring diameters.

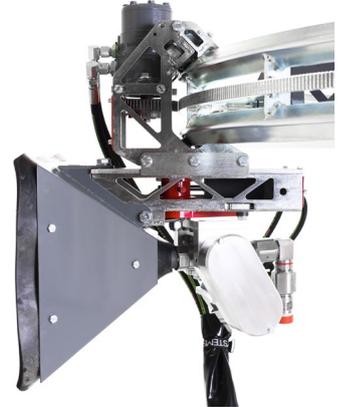

CENTRALIZER

Triple support wheels that centers itself and crank handle with two gear ratios, low and high. Centralizer support fits in tunnels with diameters 1,5-3,0 meters.



AQUA SPINE



The base of the Aqua Centralizer is the triple rail from the Aqua Spine system, which means it can be built up to 6 meters between the two centralizer supports. The Triple rail can also be mounted in front of the support to reach all the way into a dead end of a pipe.





Aqua Centralizer

FACTS

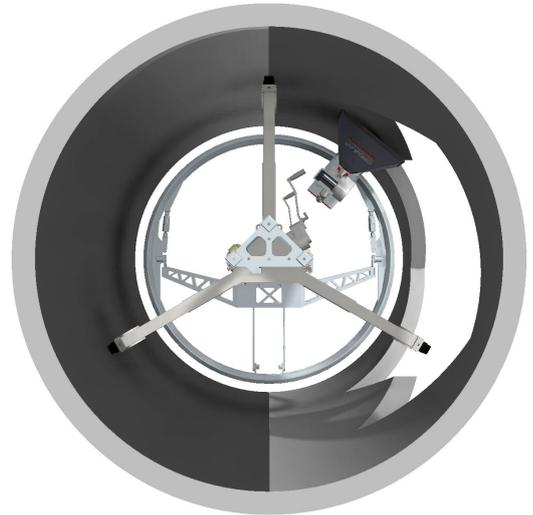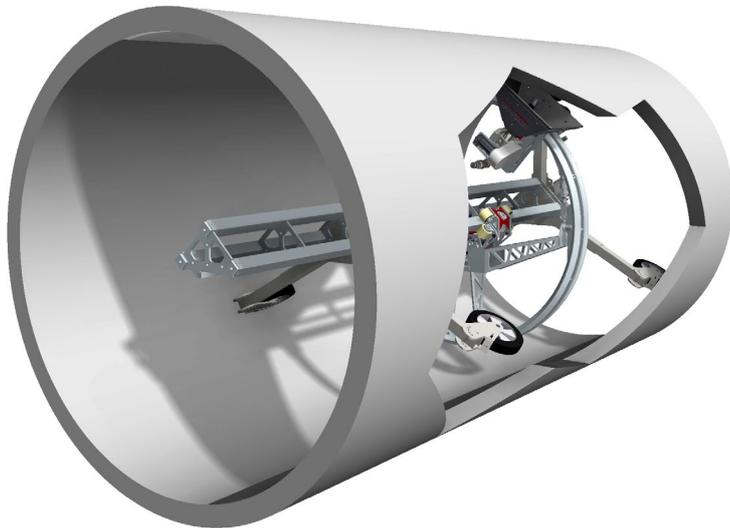

Working diameter with $\varnothing 1,0\text{m}$ ring	$\varnothing 1,5\text{-}2,0\text{m}$ (4,9-6,5 ft)
Working diameter with $\varnothing 1,5\text{m}$ ring	$\varnothing 2,0\text{-}2,5\text{m}$ (6,5-8,2 ft)
Working diameter with $\varnothing 2,0\text{m}$ ring	$\varnothing 2,5\text{-}3,0\text{m}$ (8,2-9,8 ft)
Max length between supports leg	6,0 m (6,6 ft)
Spine rail sections	0,5/1,0/2,0/3,0m
Max length on Spine rail outside	1m (3,3 ft)
Lance angle	$\pm 25^\circ$
Oscillation step 1	$5^\circ / 26\text{mm}$ (1,0 in)
Oscillation step 2	$9^\circ / 48\text{mm}$ (2,0 in)
Oscillation step 3	$14^\circ / 74\text{mm}$ (2,5 in)
Lance adjustment in-out	250mm (9,8 in)
Total weight with ring $\varnothing 1,5\text{m}$ (4,9 ft)	420 kg (925 lb)
Total weight complete with all rings	590 kg (1300 lb)
Max reaction force	2000 N
Roller speed	AUTO
Indexing speed	AUTO
Max water depth continuous	1m (3,3 ft)
Max water depth intermittent	10m (33 ft)
Max hydraulic pressure	160 bar
Operational hydraulic pressure	110 bar
Hydraulic oil type	ISO VG32
Hoist gear oil type	ISO VG320-460
Hoist gear oil volume	0,08 l



AGS051E 1905

Call us: + 46 383 508 01
 E-mail us: aquajet@aquajet.se
 Visit us: Brunnsvägen 15, SE-574 53 Holsbybrunn, SWEDEN
www.aquajet.se

AQUAJET
 SYSTEMS AB